



AirWave Pro

Wireless Lavalier Microphone
K1/K2/Combo

User Manual

K1

AirWave Pro(USB-C)



AirWave Pro (Lightning)




AirWave Pro (Camera)




K2

AirWave Pro (USB-C)



AirWave Pro (Lightning)




AirWave Pro (Camera)



Combo

AirWave Pro (Combo)




① Charging case

- Indicator

※ Flashing ●

Charging case power status	Indicator
Less than 25%	● ○ ○ ○
25%-50%	● ● ○ ○
50%-75%	● ● ● ○
75%-100%	● ● ● ●
100%	● ● ● ●



USB-C Charging Port

② TX



2s ON/OFF

x1 AI Noise Cancellation/
Level-2 Noise Cancellation
ON/OFF

x2 /

Charging Contacts




LED Indicator

LED Indicator	Status
Static blue light	TX and RX connected
Flashing blue	TX and RX not connected
Static red light	Mute
TX and RX static green light	AI Noise Cancellation
TX and RX static purple light	Level-2 Noise Cancellation
Flashing red	Low battery
Static green light(Inbox)	Charging

③ RX

Smartphone Version (USB-C/iOS Lightning)

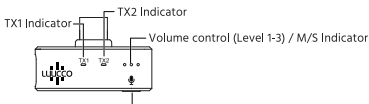


Volume control (+/-) / M/S button

- Short press to adjust Volume level.
- Short press three times continuously, Stereo ON/OFF.

LED Indicator	Status
Volume LED flash from left to right.	Stereo ON
Volume LED flash from right to left.	Stereo OFF


Camera Version

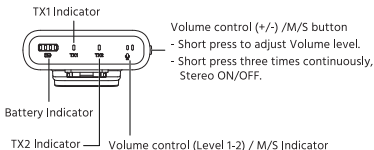

Volume control (+/-) / M/S button

- Short press to adjust Volume level.
- Short press three times continuously, Stereo ON/OFF.

LED Indicator	Status
Volume LED flash from left to right.	Stereo ON
Volume LED flash from right to left.	Stereo OFF
Battery indicator flashed red	Low battery




Product Usage


① How to Wear




② Charge TX separately

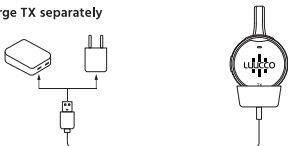

Product Usage (Mobile Version)




Charge the external
device while using



Product Usage (Camera Version)

Connect RX to camera



Specifications

Wireless Transmission:	Digital 2.4GHz
Wireless Modulation Mode:	GFSK
Built-in Microphone:	Omnidirectional
	Frequency Range: 20Hz-20kHz
	Sensitivity: -38dB±2dB@1KHz
Sound delay:	< 25ms
Signal to noise ratio:	> 82dB
Sampling Rate:	48 kHz
Operation Range:	150m (492ft) (Line of Sight)/30m (100ft) for NLOS
Battery Capacity:	TX: 80 mAh
	RX (Camera): 110 mAh
	Charging case: 1000 mAh
Operating Time:	> 2.5 times
Charging Time:	2.5 hours
Weight:	TX: 9g(0.3oz)
	RX (USB-C/Lightning): 4g(0.14oz)
	RX (Camera): 10g(0.4oz)
Size:	TX: $\varnothing 24 \times 14.9\text{mm}$ (0.9" x 0.6")
	RX(USB-C/Lightning): 35×10×22.5mm(1.4" x 0.4" x 0.9")
	RX (Camera): 36 x 23 x 16.5mm (1.4" x 0.9" x 0.6")
	Charge case: 107 x 68 x 60mm (4.2" x 2.7" x 2.4")



www.luuccotech.com

Manufacturer: Luucco (Shenzhen) Technology Co., Ltd.

Add.: No.6A-B7, BLD#10, Yuanyang Xintiandi Shui'an Garden,
Shenglong Road, Longgang, Shenzhen, Guangdong, China

Email: sales@luuccotech.com

www.luuccotech.com